

XF

JAGUAR

XF SALOON - TECHNICAL SPECIFICATION

POWERTRAIN		D200 MHEV	
Transmission	Automatic		
Driveline: All Wheel Drive (AWD) or Rear Wheel Drive (RWD)	RWD		AWD
Maximum power (PS (kW) / rpm)	204 (150) / 3.750		204 (150) / 3.750
Maximum torque (Nm / rpm)	430 / 1.750-2.500		430 / 1.750-2.500
Capacity (cc)	1.998		1.998
No. of cylinders / Valves per cylinder	4 / 4		4 / 4
Cylinder layout	Inline		Inline
Bore / stroke (mm)	83 / 92.3		83 / 92.3
Compression ratio (+/-0.5)	16.5		16.5
PERFORMANCE			
Acceleration (secs) 0-100 km/h (0-60mph)	7,6 (7,1)		7,8 (7,3)
Maximum speed km/h (mph)	235 (146)		230 (143)
BRAKES			
Front type	Single Piston Sliding Caliper, Vented Disc		
Front diameter (mm)	325		325
Rear type	Single Piston Sliding Caliper, Vented Disc		
Rear diameter (mm)	325		325
Park Brake	iEPB, motor on caliper		

Some features on images may vary between optional and standard for different model years and due to the impact of Covid-19, many of our images have not been updated to reflect 24MY specifications. Please refer to the car configurator and additionally consult your local Retailer for detailed 24MY specifications and do not base an order on website imagery alone. Jaguar Land Rover Limited is constantly seeking ways to improve the specification, design and production of its vehicles, parts and accessories and alterations take place continually, and we reserve the right to change without notice.

XF SALOON - TECHNICAL SPECIFICATION

WEIGHTS (kg)*		D200 MHEV
Unladen weight (EU)**	1.810	1.869
Unladen weight (DIN)†	1.735	1.794
Gross Vehicle Weight (GVW)	2.350	2.410
TOWING (kg)		
Unbraked trailer	750	750
Maximum towing	2.000	2.000
Maximum coupling point (nose weight)	100	100
Maximum vehicle and trailer combination	4.350	4.410
ROOF CARRYING (kg)		
Maximum roof load (including cross bars)	75	75

*Weights reflect vehicles to standard specifications. Optional extras increase weight. **Includes a 75kg driver, full fluids and 90% fuel. †Includes full fluids and 90% fuel.

XF SALOON - TECHNICAL SPECIFICATION

FUEL ECONOMY			D200 MHEV	
Fuel tank capacity - useable litres			68	
Diesel/Gasoline Particulate Filter (DPF/GPF)			■	
WLTP*				
Driveline			RWD	AWD
WLTP Consumption	Low	l/100km (mpg)	6,5-6,9 (43,5-40,9)	7,0-8,1 (40,4-34,9)
	Medium	l/100km (mpg)	5,2-5,8 (54,3-48,7)	5,6-6,2 (50,4-45,6)
	High	l/100km (mpg)	4,2-4,8 (67,3-58,9)	4,7-5,1 (60,1-55,4)
	Extra High	l/100km (mpg)	4,9-5,6 (57,6-50,4)	5,2-5,7 (54,3-49,6)
	Combined	l/100km (mpg)	5,0-5,5 (56,5-51,4)	5,4-5,9 (52,3-47,9)
WLTP CO ₂ Emissions	Low	(g/km)	169-180	183-212
	Medium	(g/km)	136-152	148-163
	High	(g/km)	111-126	124-133
	Extra High	(g/km)	128-146	137-150
	Combined	(g/km)	130-145	142-155

■ Standard.

*The figures provided are as a result of official manufacturer’s tests in accordance with EU legislation. For comparison purposes only. Real-world figures may differ. CO₂ and fuel economy figures may vary according to factors such as driving styles, environmental conditions, load, wheel fitment and accessories fitted

XF SALOON - TECHNICAL SPECIFICATION

POWERTRAIN	P250	P300
Transmission	Automatic	Automatic
Driveline: All Wheel Drive (AWD) or Rear Wheel Drive (RWD)	RWD	AWD
Maximum power (PS (kW) / rpm)	250 (184) / 5.500	300 (221) / 5.500
Maximum torque (Nm / rpm)	365 / 1.300-4.500	400 / 1.500-4.500
Capacity (cc)	1.998	1.998
No. of cylinders / Valves per cylinder	4 / 4	4 / 4
Cylinder layout	Inline	Inline
Bore / stroke (mm)	83 / 92.3	83 / 92.3
Compression ratio (+/-0.5)	10.5	9.5
PERFORMANCE		
Acceleration (secs) 0-100 km/h (0-60mph)	6,9 (6,5)	6,1 (5,8)
Maximum speed km/h (mph)	250 (155)	250 (155)
BRAKES		
Front type	Single Piston Sliding Caliper, Vented Disc	Single Piston Sliding Caliper, Vented Disc
Front diameter (mm)	350	350
Rear type	Single Piston Sliding Caliper, Vented Disc	Single Piston Sliding Caliper, Vented Disc
Rear diameter (mm)	325	325
Park Brake	iEPB, motor on caliper	iEPB, motor on caliper

XF SALOON - TECHNICAL SPECIFICATION

WEIGHTS (kg)*	P250	P300
Unladen weight (EU)**	1.735	1.819
Unladen weight (DIN)†	1.660	1.744
Gross Vehicle Weight (GVW)	2.290	2.370
TOWING (kg)		
Unbraked trailer	750	750
Maximum towing	1.900	1.900
Maximum coupling point (nose weight)	100	100
Maximum vehicle and trailer combination	4.190	4.270
ROOF CARRYING (kg)		
Maximum roof load (including cross bars)	75	75

*Weights reflect vehicles to standard specifications. Optional extras increase weight. **Includes a 75kg driver, full fluids and 90% fuel. †Includes full fluids and 90% fuel.

XF SALOON - TECHNICAL SPECIFICATION

FUEL ECONOMY			P250	P300
Fuel tank capacity - useable litres			74	74
Diesel / Gasoline Particulate Filter (DPF / GPF)			■	■
WLTP*				
Driveline			RWD	AWD
WLTP Consumption	Low	l/100km (mpg)	11,4-11,9 (24,8-23,7)	12,0-12,5 (23,5-22,6)
	Medium	l/100km (mpg)	7,9-8,5 (35,8-33,2)	8,6-9,1 (32,8-31,0)
	High	l/100km (mpg)	6,7-7,2 (42,2-39,2)	7,3-7,7 (38,7-36,7)
	Extra High	l/100km (mpg)	7,2-8,0 (39,2-35,3)	7,8-8,5 (36,2-33,2)
	Combined	l/100km (mpg)	7,7-8,4 (36,7-33,6)	8,4-8,9 (33,6-31,7)
WLTP CO ₂ Emissions	Low	(g/km)	261-271	275-285
	Medium	(g/km)	180-193	196-207
	High	(g/km)	152-164	165-175
	Extra High	(g/km)	164-182	178-193
	Combined	(g/km)	177-191	191-203

■ Standard.

*The figures provided are as a result of official manufacturer’s tests in accordance with EU legislation. For comparison purposes only. Real-world figures may differ. CO₂ and fuel economy figures may vary according to factors such as driving styles, environmental conditions, load, wheel fitment and accessories fitted.

XF SPORTBRAKE - TECHNICAL SPECIFICATION

POWERTRAIN		D200 MHEV	
Transmission	Automatic		
Driveline: All Wheel Drive (AWD) or Rear Wheel Drive (RWD)	RWD		AWD
Maximum power (PS (kW) / rpm)	204 (150) / 3.750		204 (150) / 3.750
Maximum torque (Nm / rpm)	430 / 1.750-2.500		430 / 1.750-2.500
Capacity (cc)	1.998		1.998
No. of cylinders / Valves per cylinder	4 / 4		4 / 4
Cylinder layout	Inline		Inline
Bore / stroke (mm)	83 / 92,3		83 / 92,3
Compression ratio (+/-0.5)	16,5		16,5
PERFORMANCE			
Acceleration (secs) 0-100 km/h (0-60mph)	7,8 (7,3)		8,0 (7,5)
Maximum speed km/h (mph)	230 (143)		230 (143)
BRAKES			
Front type	Single Piston Sliding Caliper, Vented Disc		
Front diameter (mm)	325		325
Rear type	Single Piston Sliding Caliper, Vented Disc		
Rear diameter (mm)	325		325
Park Brake	iEPB, motor on caliper		

XF SPORTBRAKE - TECHNICAL SPECIFICATION

WEIGHTS (kg)*		D200 MHEV
Unladen weight (EU)**	1.870	1.931
Unladen weight (DIN)†	1.795	1.856
Gross Vehicle Weight (GVW)	2.390	2.450
TOWING (kg)		
Unbraked trailer	750	750
Maximum towing	2.000	2.000
Maximum coupling point (nose weight)	100	100
Maximum vehicle and trailer combination	4.390	4.450
ROOF CARRYING (kg)		
Maximum roof load (including cross bars)	75	75

*Weights reflect vehicles to standard specifications. Optional extras increase weight. **Includes a 75kg driver, full fluids and 90% fuel. †Includes full fluids and 90% fuel.

XF SPORTBRAKE - TECHNICAL SPECIFICATION

FUEL ECONOMY			D200 MHEV	
Fuel tank capacity - useable litres			68	
Diesel / Gasoline Particulate Filter (DPF / GPF)			■	
WLTP*				
Driveline			RWD	AWD
WLTP Consumption	Low	l/100km (mpg)	6,6-6,9 (42,8-40,9)	7,3-8,3 (38,7-34,0)
	Medium	l/100km (mpg)	5,4-5,9 (52,3-47,9)	5,8-6,3 (48,7-44,8)
	High	l/100km (mpg)	4,5-5,0 (62,8-56,5)	4,9-5,2 (57,6-54,3)
	Extra High	l/100km (mpg)	5,3-5,8 (53,3-48,7)	5,5-5,9 (51,4-47,9)
	Combined	l/100km (mpg)	5,2-5,7 (54,3-49,6)	5,7-6,1 (49,6-46,3)
WLTP CO ₂ Emissions	Low	(g/km)	172-182	192-217
	Medium	(g/km)	141-155	153-166
	High	(g/km)	117-130	128-136
	Extra High	(g/km)	138-152	145-155
	Combined	(g/km)	137-150	148-160

■ Standard.

*The figures provided are as a result of official manufacturer’s tests in accordance with EU legislation. For comparison purposes only. Real-world figures may differ. CO₂ and fuel economy figures may vary according to factors such as driving styles, environmental conditions, load, wheel fitment and accessories fitted.

XF SPORTBRAKE - TECHNICAL SPECIFICATION

POWERTRAIN	P250	P300
Transmission	Automatic	Automatic
Driveline: All Wheel Drive (AWD) or Rear Wheel Drive (RWD)	RWD	AWD
Maximum power (PS (kW) / rpm)	250 (184) / 5.500	300 (221) / 5.500
Maximum torque (Nm / rpm)	365 / 1.300-4.500	400 / 1.500-4.500
Capacity (cc)	1.998	1.998
No. of cylinders / Valves per cylinder	4 / 4	4 / 4
Cylinder layout	Inline	Inline
Bore / stroke (mm)	83 / 92,3	83 / 92,3
Compression ratio (+/-0.5)	10,5	9,5
PERFORMANCE		
Acceleration (secs) 0-100 km/h (0-60mph)	7,1 (6,7)	6,2 (5,9)
Maximum speed km/h (mph)	241 (150)	250 (155)
BRAKES		
Front type	Single Piston Sliding Caliper, Vented Disc	
Front diameter (mm)	350	350
Rear type	Single Piston Sliding Caliper, Vented Disc	
Rear diameter (mm)	325	325
Park Brake	iEPB, motor on caliper	

XF SPORTBRAKE - TECHNICAL SPECIFICATION

WEIGHTS (kg)*	P250	P300
Unladen weight (EU)**	1.801	1.880
Unladen weight (DIN)†	1.726	1.805
Gross Vehicle Weight (GVW)	2.330	2.400
TOWING (kg)		
Unbraked trailer	750	750
Maximum towing	1.900	1.900
Maximum coupling point (nose weight)	100	100
Maximum vehicle and trailer combination	4.230	4.300
ROOF CARRYING (kg)		
Maximum roof load (including cross bars)	75	75

*Weights reflect vehicles to standard specifications. Optional extras increase weight. **Includes a 75kg driver, full fluids and 90% fuel. †Includes full fluids and 90% fuel.

XF SPORTBRAKE - TECHNICAL SPECIFICATION

FUEL ECONOMY			P250	P300
Fuel tank capacity - useable litres			74	74
Diesel / Gasoline Particulate Filter (DPF / GPF)			■	■
WLTP*				
Driveline			RWD	AWD
WLTP Consumption	Low	l/100km (mpg)	11,6-12,0 (24,4-23,5)	12,2-12,6 (23,2-22,4)
	Medium	l/100km (mpg)	8,1-8,6 (34,9-32,8)	8,8-9,2 (32,1-30,7)
	High	l/100km (mpg)	6,9-7,4 (40,9-38,2)	7,5-7,8 (37,7-36,2)
	Extra High	l/100km (mpg)	7,6-8,3 (37,2-34,0)	8,2-8,7 (34,4-32,5)
	Combined	l/100km (mpg)	8,0-8,6 (35,3-32,8)	8,6-9,1 (32,8-31,0)
WLTP CO ₂ Emissions	Low	(g/km)	264-274	279-287
	Medium	(g/km)	185-197	201-210
	High	(g/km)	158-168	170-178
	Extra High	(g/km)	174-189	187-199
	Combined	(g/km)	183-196	197-207

■ Standard.

*The figures provided are as a result of official manufacturer’s tests in accordance with EU legislation. For comparison purposes only. Real-world figures may differ. CO₂ and fuel economy figures may vary according to factors such as driving styles, environmental conditions, load, wheel fitment and accessories fitted.

XF SALOON - DIMENSIONS

Vehicle Height – 1.456mm

Headroom

Maximum headroom with / without
Panoramic roof fitted
Front headroom 953mm / 991mm
Rear headroom 970mm / 970mm

Vehicle Width

With mirrors unfolded 2.089mm,
With mirrors folded 1.982mm
No mirrors 1.890mm

Legroom


Maximum front legroom 1.054mm
Maximum rear legroom 957mm

Loadspace Capacity

Height 687mm, Width 1.203mm
Loadspace width between arches 791mm
Maximum loadspace volume behind first row
Dry* 1.128 litres, Wet** 1.484 litres
Maximum loadspace volume behind second row
Dry* 344 litres, Wet** 459 litres

Turning Circle

Kerb-to-kerb 12,02m
Wall-to-wall 12,40m
Turns lock-to-lock 2,6

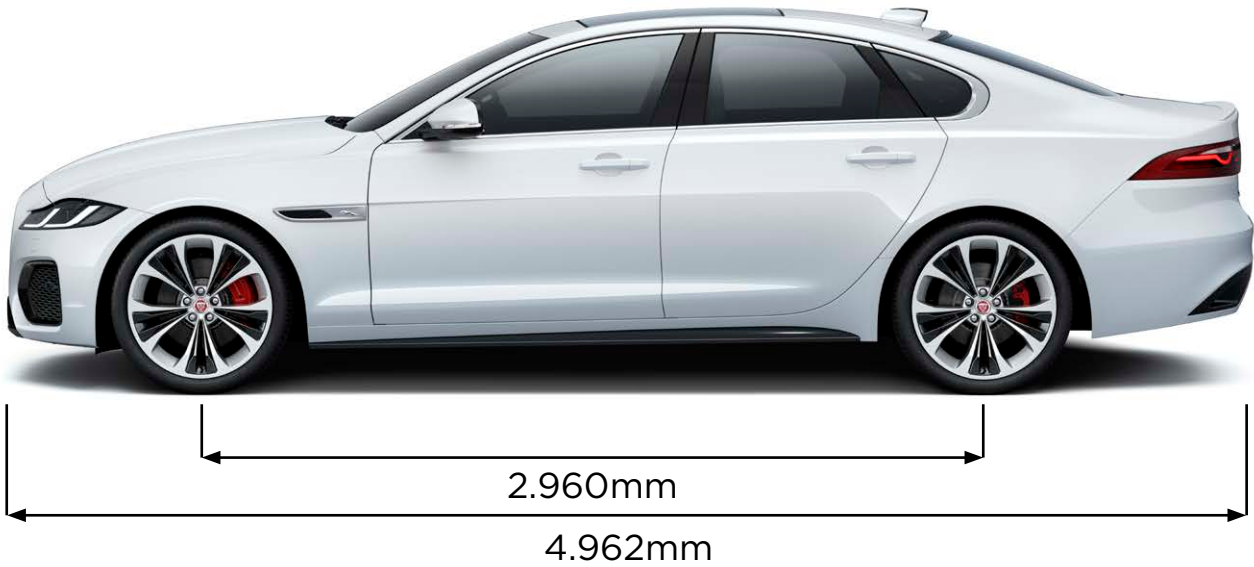

*Dry: Volume as measured with VDA-compliant solid blocks (200mm x 50mm x 100mm).
**Wet: Volume as measured by simulating the loadspace filled with liquid.
Dimensions were measured with vehicle at unladen weight.

XF SPORTBRAKE - DIMENSIONS

Vehicle Height – 1.494mm

Headroom

Maximum headroom with / without
Panoramic roof fitted
Front headroom 989mm / 991mm
Rear headroom 991mm / 994mm

Vehicle Width

With mirrors unfolded 2.089mm,
With mirrors folded 1.982mm
No mirrors 1.890mm

Legroom


Maximum front legroom 1.054mm
Maximum rear legroom 957mm

Loadspace Capacity

Height 635mm, Width 1.089mm
Loadspace width between arches 1.058mm
Maximum loadspace volume behind first row
Dry* 1.342 litres, Wet** 1.695 litres
Maximum loadspace volume behind second row
Dry* 563 litres, Wet** 716 litres

Turning Circle

Kerb-to-kerb 12,02m
Wall-to-wall 12,40m
Turns lock-to-lock 2,6

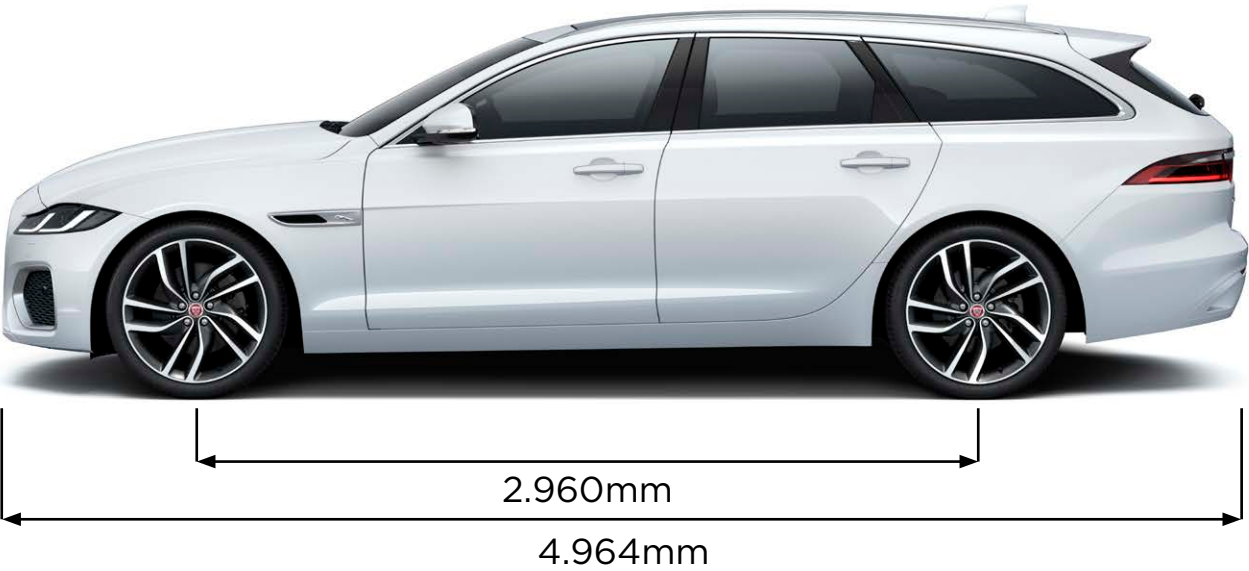

*Dry: Volume as measured with VDA-compliant solid blocks (200mm x 50mm x 100mm).
**Wet: Volume as measured by simulating the loadspace filled with liquid.
Dimensions were measured with vehicle at unladen weight.